



# Experimental and Analytical Studies on Post-Punching Behavior of RC Flat Slabs: Local Failure and Progressive Collapse Analysis of Structures

Yaser Mirzaei and Mehرداد Sasani (y.mirzaei@neu.edu and sasani@neu.edu)

Department of Civil and Environmental Engineering, Northeastern University, Boston, MA



## Abstract

Column failure due to an explosion, impact, or other accidental events can propagate in the structure through punching shear failure at the location of the neighboring columns, leading to progressive collapse. Using a mechanical model previously developed by Mirzaei, an analytical model is developed to be used in finite element models of flat plate/slab structures to estimate the initiation of punching shear failure as well as post-punching shear response using ABAQUS. The mechanical model is used to determine the mechanical properties of the analytical model of the connection zone, which is between a rigid zone of slab directly above the column and the rest of the slab. The model of the connection zone simulates the contribution of the reinforcing bars to the shear transfer after a punching shear failure. The analytical model and the results of system level study can be of interest in assessing progressive collapse resistance of existing structures and in design of new structures.


## Background

- On January 25, 1971, two thirds of a 16-story apartment building collapsed at 2000 Commonwealth Avenue, Boston, Massachusetts. Four workers died after a failure on the roof instigated a progressive collapse all the way to the basement, where the men were found.
- As a local punching failure can trigger progressive collapse, the study of the post-punching behavior can help adopting constructive solutions to avoid progressive collapse.
- The post-punching resistance is provided by reinforcing bars passing through the punching cone as they are the only link between the damaged area and the rest of the slab. These reinforcing bars can carry load by developing high tensile stresses ( $> f_y$ ) accompanied by a significant inclination


## Experiments

### a) Local behavior

- A total of 24 slab specimens with various reinforcement layouts were tested at the EPFL, Switzerland.
- Effects of tensile reinforcement, integrity reinforcement passing through the column, bent-up-bars, and anchorage details were investigated.
- All specimens were identical in geometry but different in reinforcement layout.

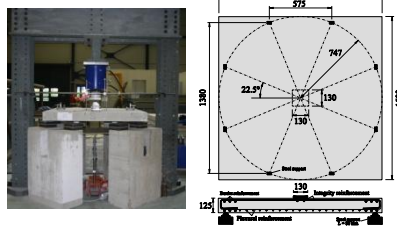


- Tensile reinforcement contribution is not significant because of concrete spalling and possible anchorage problems
- Integrity reinforcement and bent-up bars provides considerable post-punching resistance
- Hot-rolled steel is strongly recommended for integrity reinforcement to provide large deformation capacity

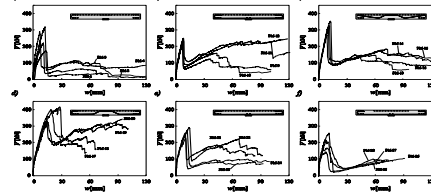


Load-deflection response of all test specimens

### b) System-Level Response




Response of an actual two-story parking garage with flat slab following column explosion is experimentally evaluated (recorded deformation shown below)

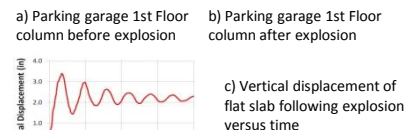

Vertical displacement of flat slab following explosion versus time

## Mechanical Model

- A generic procedure was developed capable of predicting the behavior of all possible mechanisms
- Concept of concrete breakout strength, maximum concrete breakout strength, spalling strength of concrete cover, and strain-based failure criterion in post-punching were introduced
- Various approaches were proposed to consider both the elastic and the plastic behavior of reinforcing bars crossing the punching cone




Integrity reinforcement      Tensile reinforcement

$$V_{u,i} = N_i \sin \psi_{u,i} + \frac{\sigma^2}{3L} f_{cr} (1 - \frac{N_i^2}{N_c^2}) \cos^2 \psi_{u,i}$$

$$V_{u,t} = N_t \sin \psi_{u,t} + \frac{\sigma^2}{3L} f_{cr} (1 - \frac{N_t^2}{N_c^2}) \cos^2 \psi_{u,t}$$


$$V_{u,p} = V_{u,i} + V_{u,t} = \sum V_{u,i} + \sum V_{u,t}$$

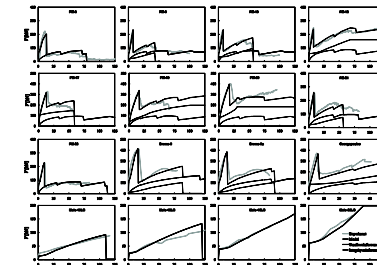


Comparison of theoretical and experimental results

## Analytical Simulation


### a) Local behavior

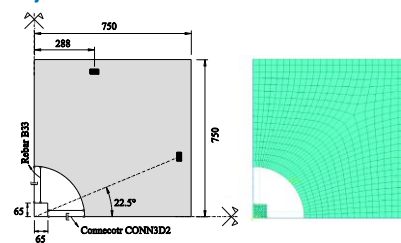

Geometry and mesh generation of the finite element model (simulation of the local post-punching behavior)




a) Various critical zones due to interaction between concrete and reinforcing bars and b) critical zone of concrete breakout over integrity reinforcement




Comparison of theoretical and experimental result

### b) System-Level Response

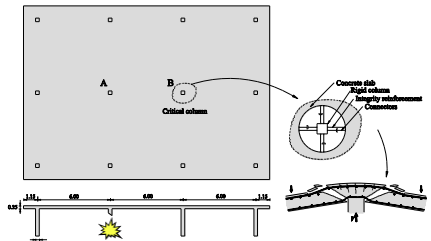

Analytical model of the system level study of progressive collapse due to punching shear failure



Slab deflection right before (0.00228 m) and right after punching shear failure of column B (0.00408 m)

## References

- Sasani, M.; Bazan, M.; and Sagiroyu, S., "Experimental and Analytical Progressive Collapse Evaluation of an Actual Reinforced Concrete Structure," *ACI Structural Journal*, Vol. 104, No. 6, pp. 731-739, Nov.-Dec. 2007.
- Mirzaei, Y., "Post-punching behavior of reinforced concrete slabs", EPFL Thesis No. 4613, pp. 230, Lausanne, Switzerland, 2010.
- Muttoni, A., "Punching shear strength of reinforced concrete slabs without transverse reinforcement", *ACI Structural Journal*, Vol. 105, No. 4, pp. 440-450, USA, July-August, 2008.
- Mirzaei, Y., and Sasani, M., "Finite Element Modeling of Post-Punching Behavior of Reinforced Concrete Flat Slab Structures", *IMPLAST 2010, Plasticity, Impact, and Blast Symposium*, Society for Experimental Mechanics, Providence, RI, October, 2010.

This material is based on work supported by the U.S. Department of Homeland Security under Award Number 2008-ST-063-ED0001. The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied of the U.S. Department of Homeland Security.